

# External wall grille

VR




## Description

VR is a square louvred grille for installation in external walls. VR is used for both fresh air intake and discharge. VR is equipped as standard with a safe-seal circular connection.

## Maintenance

The grille should be removed to gain access to the duct. The external parts should be wiped with a damp cloth.

## Dimensions

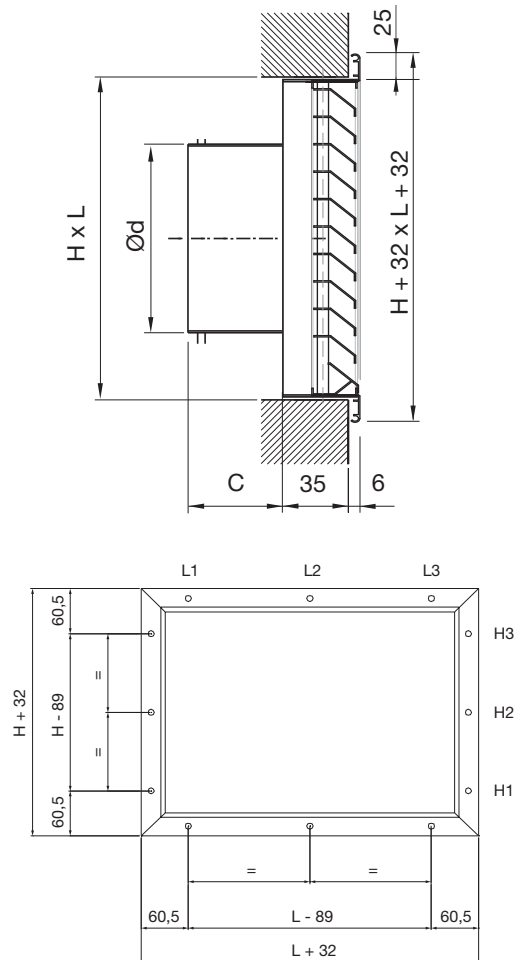

Ød	L mm (width)	H mm (height)	Dept galv. Plenum	Outside width (L+32)	Outside height (H+32)	C mm (Ød connection)	Free area A <sub>k</sub> (m <sup>2</sup> )	Weight kg	Screw hole location
125	200	200	35	232	232	40	0.018	0.80	H2
160	200	200	35	232	232	40	0.018	1.00	H2
200	250	250	35	282	282	40	0.031	1.40	H2
250	300	300	35	332	332	60	0.047	2.10	H1+H3
315	400	400	35	432	432	60	0.091	2.60	L1+L3
400	500	500	35	532	532	90	0.148	3.50	L1+L3

## Order code

Product **VR** **aaa**  
 Type \_\_\_\_\_  
 Size \_\_\_\_\_

## Materials and finish

Grille: Aluminium  
 Standard finish: Anodized  
 Birdnet: Galvanized steel  
 Plenum box: Galvanized steel


Can be supplied anodized or powder-coated. Contact Lindab's sales department for further information.

# External wall grille

VR

## Technical data

### Intake

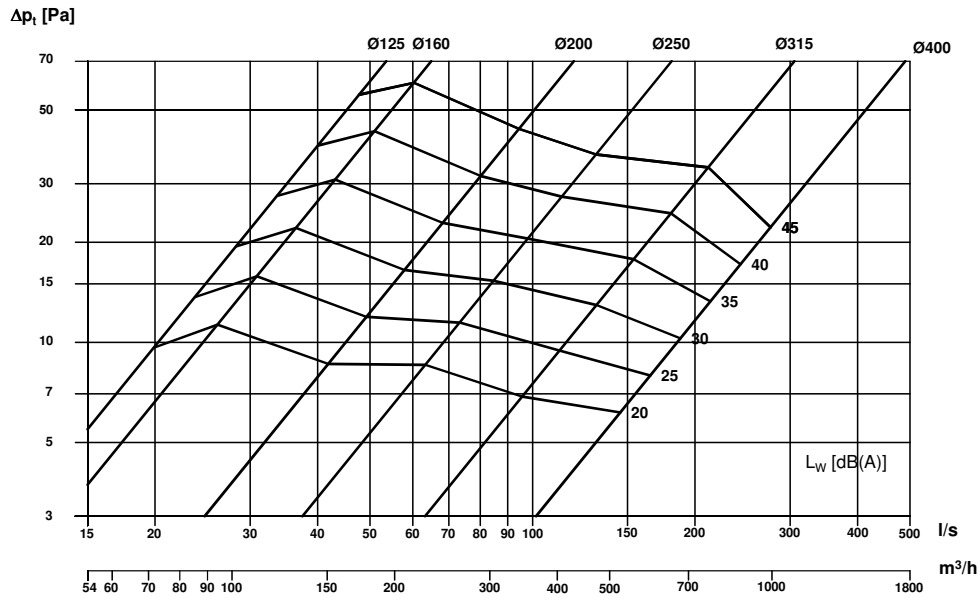

### Discharge

